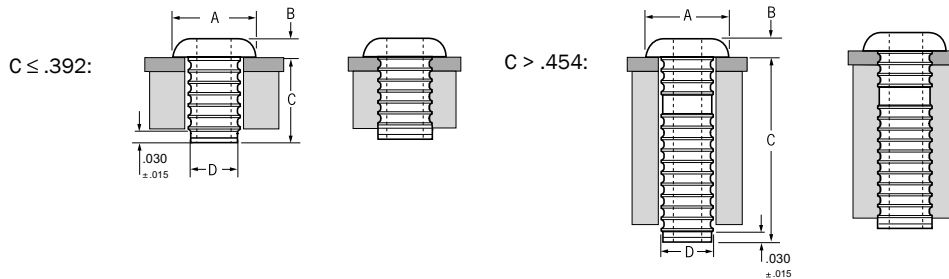






English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Brass*	Laiton*	Kupfer-Zink Legierung*	Ottone*	Latón*
Electro tin plated	Etamage électrolytique	verzinkt	Stagnato	Estañado electrolítico

\*: BS EN 12166 CW 508L DIN 17660 CuZn37



ø			A	B	C	D	 lb <sup>f1</sup>	Fasteners per pod/ Nombre de rivets par chargeur / Niete pro Magazin / Rivetti per caricatore / Uds./carga ± 1	Part No/ref
	nom.	min.							
2.5 mm	.098	.102	.163	.037	.204	.0973	10	± 1	01188-02506
					.267				01188-02508
					.329				01188-02510
					.392				01188-02512
					.454				01188-02514
					.517				01188-02516
					.579				01188-02518
					.642				01188-02520
					.704				01188-02522
2.8 mm	.110	.114	.163	.037	.204	.1078	15	± 1	01188-02806
					.267				01188-02808
					.329				01188-02810
					.392				01188-02812
					.454				01188-02814
					.517				01188-02816
					.579				01188-02818
					.642				01188-02820
					.704				01188-02822

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas



An Acument™ Global Technologies Company

www.avdel-global.com

© 2007 Acument Intellectual Properties, LLC

Avtronic® is a trademark of Avdel UK Limited

05.2007

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.  
Your local Avdel representative is at your disposal should you need to confirm latest information.