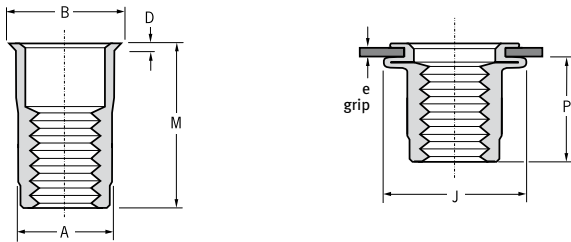



DK DKS



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Steel	Acier	Stahl	Acciaio	Acero
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente



Thread / filetage / Gewinde / filetto / rosca	e (grip)		 +.006/-0	A	B	D	J	M	P	Part No/ref								
	min.	max.		max.	±.010	±.002	max.	±.015	max.									
6-32 UNC	.020	.080	.2656	.265	.310	.019	.390	.420	.305	DKS-632-80								
	.080	.130						.470			DKS-632-130							
8-32 UNC	.020	.080						.2969		.296	.340	.450	.420	.315	DKS-832-80			
	.080	.130											.470		DKS-832-130			
10-24 UNC	.020	.130						.3906		.390	.455	.022	.550	.475	.470	DKS-1024-130		
	.130	.225												.585		DKS-1024-225		
10-32 UNF	.020	.130		.5312	.530	.595	.740		.740					.475		.425	DKS-1032-130	
	.130	.225												.585			DKS-1032-225	
1/4-20 UNC	.027	.165		.5312	.530	.595	.022		.740					.580		.470	DKS-420-165	
	.165	.260												.680			DKS-420-260	
1/4-28 UNF	.027	.165								.5312	.530	.595	.022	.740	.580		.470	DKS-428-165
	.165	.260													.680			DKS-428-260
5/16-18 UNC	.027	.150	.5312							.530	.595	.022	.740	.690	.470		DKS-518-150	
	.150	.312												.805			DKS-518-312	
5/16-24 UNF	.027	.150			.5312	.530	.595		.022					.740		.690	.425	DKS-524-150
	.150	.312														.805		DKS-524-312
3/8-16 UNC	.027	.150			.5312	.530	.595	.022	.740					.690		.470	DKS-615-150	
	.150	.312												.805			DKS-616-312	
3/8-24 UNF	.027	.150								.5312	.530	.595	.022	.740	.690		.470	DKS-624-150
	.150	.312													.805			DKS-624-312

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas







An Acument™ Global Technologies Company

www.avdel-global.com

© 2008 Acument Intellectual Properties, LLC

02.2008, page 1/2

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Avdel representative is at your disposal should you need to confirm latest information.

Thread / filetage / Gewinde / filetto / rosca				
	Recommended max torque	Pull-out	Torque-to-turn	Push-out
	lbf-in	lbf	lbf-in	lbf
6-32 UNC	47	520	10	180
8-32 UNC	65			
10-24 UNC	95	630	12	335
10-32 UNF				
1/4-20 UNC	235	685		320
1/4-28 UNF				
5/16-18 UNC	N/A	1115	24	510
5/16-24 UNF				
3/8-16 UNC				
3/8-24 UNF				