


Maxlok® 1905



| English | Français | Deutsch | Italiano | Español |
|---|---|--|--|--|
| Truss head | Tête large | Flachrundkopf groß | Testa larga | Cabeza alomada de perfil bajo |
| Pin: Medium carbon steel* Zinc plated, thickness 8 µm Clear trivalent passivated | Tige: Acier* Revêtement zingué, épaisseur 8 µm Passivation claire trivalente | Bolzen: Stahl* Verzinkt, 8 µm Klar chromatiert, Cr6-frei | Bullone: Acciaio a carbonio* Zincatura spessore 8 µm Passivazione chiara trivalente | Vástago: Acero medio al carbono* Zincado, 8 micras Pasivado claro trivalente |
| Collar: Low carbon steel** Zinc plated, thickness 8 µm Clear trivalent passivated | Bague: Acier bas carbone** Revêtement zingué, épaisseur 8 µm Passivation claire trivalente | Schließring: Stahl** Verzinkt, 8 µm Klar chromatiert, Cr6-frei | Collare: Acciaio a basso tenore di carbonio** Zincatura spessore 8 µm Passivazione chiara trivalente | Collar: Acero bajo en carbono** Zincado, 8 micras Pasivado claro trivalente |

*: BS 3111 Type 10, SAE 10B35, DIN 1654, 35B2 **: SAE 1008 EN 10263-2 C8C

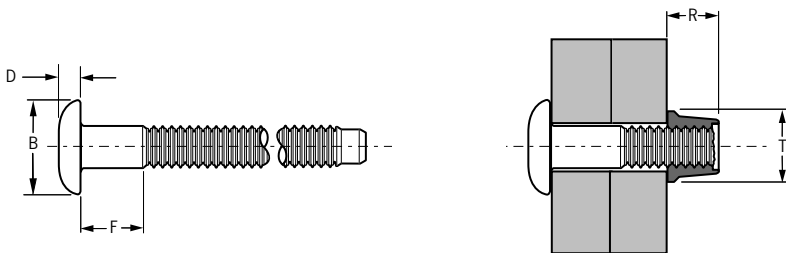

| ø | Thread | | B | D | F | R | T | lb ^{f1} | lb ^{f1} | Part No/ref | Part No/ref | |
|-----------------|--------|-------|------|------|------|------|------|------------------|------------------|-------------|-------------|-------------|
| | min. | max. | | | | | | | | | | max. |
| 3/16" 4.8 mm | .062 | .625 | .203 | .470 | .111 | .090 | .344 | .396 | 1855 | 2250 | 01905-70610 | 01981-70600 |
| | .312 | 1.250 | | | | | | | | | .330 | |
| 1/4" 6.4 mm | .062 | .625 | .265 | .595 | .121 | .085 | .531 | .516 | 2650 | 3600 | 01905-70810 | 01981-70800 |
| | .312 | 1.250 | | | | | | | | | .360 | |

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas



An Acument™ Global Technologies Company

www.avdel-global.com

© 2007 Acument Intellectual Properties, LLC

Maxlok® is a trademark of Avdel UK Limited

08.2007

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
Your local Avdel representative is at your disposal should you need to confirm latest information.