


# NeoSpeed® 57121



For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

| English                    | Français                      | Deutsch                    | Italiano                       | Español                   |
|----------------------------|-------------------------------|----------------------------|--------------------------------|---------------------------|
| Mushroom head              | Tête plate                    | Flachrundkopf              | Testa tonda                    | Cabeza alomada grande     |
| Steel*                     | Acier*                        | Stahl*                     | Acciaio*                       | Acero*                    |
| Zinc plated                | Revêtement zingué             | Verzinkt                   | Zincato                        | Zincado                   |
| Clear trivalent passivated | Passivation claire trivalente | Klar chromatiert, Cr6-frei | Passivazione chiara trivalente | Pasivado claro trivalente |

\* : BS 3111 Type 0 SAE 1008 DIN 1654 QSt34-3

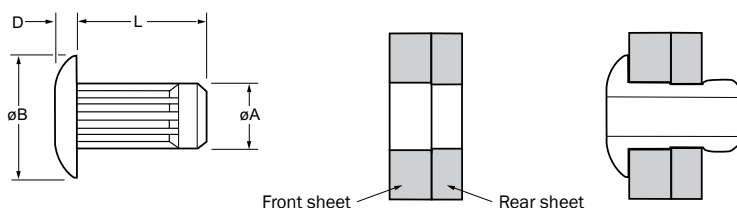

| ø               | Front sheet /<br>Pièce avant /<br>oberes Bauteil /<br>lamiera anteriore /<br>pieza delantera |      | Rear sheet /<br>Pièce arrière /<br>unteres Bauteil /<br>lamiera posteriore /<br>pieza trasera |      | øB   | D    | L    | øA   | ←→  | ↕    | Part No/ref |      |      |
|-----------------|--|------|---|------|------|------|------|------|-----|------|-------------|------|------|
|                 | min.   | max. | min.  | max. |      |      |      |      |     |      |             | max. | max. |
| 3.2*<br>(1/8")  | 0.4  | 2.0  | 3.35  | 3.62 | 3.26 | 3.42 | 6.53 | 1.10 | 4.0 | 3.17 | 1.21        | 2.06 |      |
|                 | 0.4  | 4.5  |   |      |      |      |      |      |     |      |             |      | 6.5  |
|                 | 0.4  | 8.6  |   |      |      |      |      |      |     |      |             |      | 10.7 |
| 4.0*<br>(5/32") | 0.5  | 2.2  | 4.10  | 4.43 | 3.97 | 4.18 | 8.18 | 1.25 | 4.7 | 3.90 | 1.76        | 3.16 |      |
|                 | 0.5  | 5.0  |   |      |      |      |      |      |     |      |             |      | 7.5  |
|                 | 0.5  | 9.1  |   |      |      |      |      |      |     |      |             |      | 11.7 |
| 4.8<br>(3/16")  | 0.6  | 2.4  | 5.00  | 5.40 | 4.85 | 5.10 | 9.71 | 1.50 | 5.4 | 4.79 | 2.60        | 4.20 |      |
|                 | 0.6  | 5.2  |   |      |      |      |      |      |     |      |             |      | 8.2  |
|                 | 0.6  | 9.2  |   |      |      |      |      |      |     |      |             |      | 12.4 |

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas

\* Advance information only / sous réserve de confirmation / nur zur vorläufigen Information / informazioni solo anticipate / solo informativo