


Rivscrow® 1733



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Low carbon steel*	Acier à faible teneur en carbone*	Stahl*	Acciaio a basso tenore di carbonio*	Acero bajo en carbono*
Zinc plated	Revêtement zingué	Verzinkt	Zincatura	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente

* : BS 970 Type 0, SAE 1015, DIN 17111 Rst 38-2 Werkstoff 1.0401

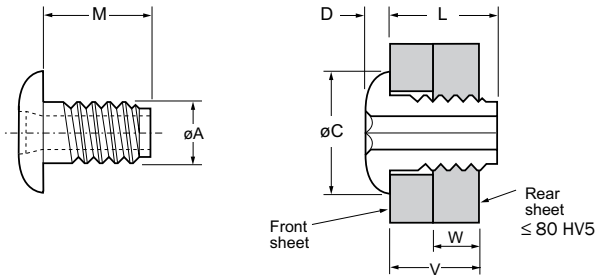

ø	Front sheet / pièce à fixer / oberes Bauteil / piastra frontale / pieza anterior		Rear sheet / pièce support / unteres Bauteil / piastra posteriore / pieza posterior		M	ø C	D	W	V	L	Hex Key Size / Dim. clef 6 pans / Sechskant- größe / Dim. chiave esagonale / llave Allen	Fasteners per pod / Nombre de rivets par chargeur / Niete pro Ma- gazin / Rivetti per caricatore / Uds./carga ± 1	Part No/ref
	nom.	min.	max.	min.									
3/16" (4.8mm)	.193	.197	.177	.181	.327	.374	.067	.110	.256	.342	2.5 mm	28	01733-04810
					.522				.453	.531		19	01733-04816

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas