


Rivscrow® PL 1742



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Dome head	Tête bombée	Flachrundkopf	Testa tonda	Cabeza alomada
Low carbon steel*	Acier à faible teneur en carbone*	Stahl*	Acciaio a basso tenore di carbonio*	Acero bajo en carbono*
Zinc plated	Zingué	Verzinkt	Zincati	Zincado
Clear passivated	Passivé clair	Klar chromatiert	Passivati	Passivado claro

* : BS 3111 Type 0, SAE 1008, DIN 1654 Qst 34-3

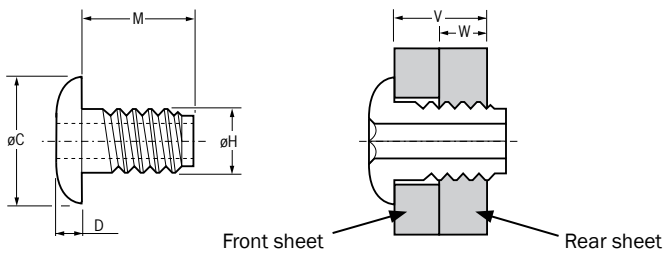

Ø	Ø H		Front sheet / Pièce à fixer / oberes Bauteil / piastra frontale / pieza anterior		Rear sheet / Pièce support / unteres Bauteil / piastra posteriore / pieza posterior		ØC	D	M	W	V	Hex Key Size / Dim. clef 6 pans/ Sechskantgröße/ Dim. chiave esagonale / llave Allen	Part No/ref	
	nom.	min.	max.	min.	max.	min.								max.
3.0 mm	.1067	.1106	.129	.132	.111	.114	.244	.047	.273	.110	.215	1/16"	01742-03008	
									.398		.340			01742-03012
									.523		.465			
3.5 mm	.1180	.1215	.139	.142	.122	.125	.244		.273	.120	.215	1/16"	01742-03508	
									.398		.340			01742-03512
									.523		.465			
4.0 mm	.1295	.1334	.161	.164	.1338	.1368	.319		.273	.120	.215	5/64"	01742-04008	
									.398		.340			01742-04012
									.523		.465			
4.5 mm	.1531	.1571	.194	.197	.1575	.1605	.319		.273	.120	.215	2.5 mm	01742-04508	
									.398		.340			01742-04512
									.523		.465			

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

