

Avex® 1624


For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.



English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Low carbon steel*	Corps: Acier bas carbone*	Hülse: Stahl*	Corpo: Acciaio a basso tenore di carbonio*	Cuerpo: Acero bajo en carbono*
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Stem: Low carbon steel**	Tige: Acier bas carbone**	Dorn: Stahl**	Gambo: Acciaio a basso tenore di carbonio**	Vástago: Acero bajo en carbono**
Zinc coated	Revêtement zingué	Verzinkt	Zincato	Zincado

*: BS3111 Type 0, SAE 1008, DIN 1654, QSt 34-3

** : BS3111 Type 0, SAE 1010/1015/1018/1022, DIN 17210, Cq10 / DIN 1654 Cq10/Cq15/Cq22

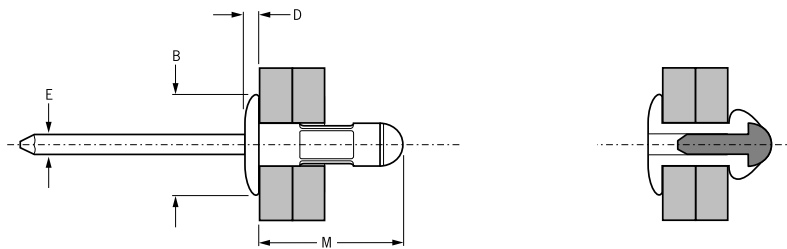

ø	[Diagram]		[Diagram]		M	B	D	E	[Diagram]	[Diagram]	Part No/ref
	min.	max.	min.	max.							
3.2 (1/8")	1.12	4.0	3.28	3.40	11.4	7.55	1.19	2.12	1.3	1.7	01624-00411
	3.7	6.6			13.8						01624-00414
4.0 (5/32")	2.0	4.0	4.10	4.22	9.6	8.44	1.57	2.77	1.9	2.3	01624-00508
	1.4	5.0			13.7						01624-00514
4.8 (3/16")	1.2	4.8	4.90	5.03	13.5	10.09	2.13	3.42	3.6	3.3	01624-00612
	4.0	6.3			15.7						01624-00616

all dimensions in mm / en millimètre / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas



An Acument™ Global Technologies Company

www.avdel-global.com

© 2009 Acument Intellectual Properties, LLC

Avex® is a trademark of Avdel UK Limited

10.2009

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Avdel representative is at your disposal should you need to confirm latest information.